

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
15 March 2001 (15.03.2001)


PCT

(10) International Publication Number  
WO 01/19032 A1

- (51) International Patent Classification<sup>7</sup>: H04L 12/28, 12/46
- (21) International Application Number: PCT/EP00/08449
- (22) International Filing Date: 30 August 2000 (30.08.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
9921049.4 7 September 1999 (07.09.1999) GB
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors: HILLIER, Paul, V.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). LANIGAN, Peter, J.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). SHEPHERD, Nicoll, B.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (54) Agent: WHITE, Andrew, G.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.  
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

[Continued on next page]

(54) Title: CLUSTERED NETWORKED DEVICES

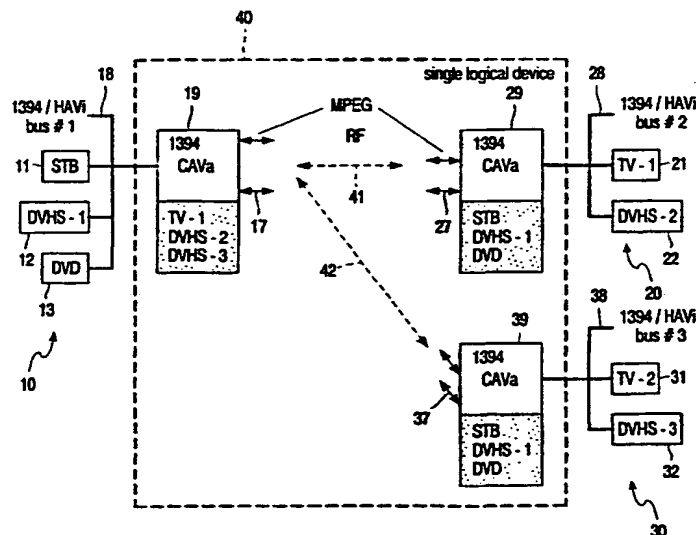

(57) Abstract: A local communication system comprises a first cluster (10) of devices interconnected for the communication of messages via a first data bus (18) and in accordance with a first set of communication protocols, a second cluster (20) interconnected via a second data bus (28) and following the first set of communication protocols; and a data channel (41) linking a device (19) of the first cluster (10) and a device (29) of the second cluster (20). The data channel (41) suitably comprises an RF link supporting communication of messages in accordance with a second set of communications protocols. A device (19) of the first cluster (10) holds a stored software representation of operational features of a selected device (DVHS-2) of the second cluster (20) and any device (11) of the first cluster wishing to interact with said selected device (DVHS-2; 22) instead interacts with said stored representation.



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## DESCRIPTION

## CLUSTERED NETWORKED DEVICES

5       The present invention relates to networked systems composed of a plurality of devices clustered for the exchange of data and control messages formatted according to predetermined protocols and, in particular although not essentially, to such systems where inter-device communication between some of the devices is via wireless link. The invention further relates to devices for  
10 use in groups or clusters to form such systems.

Networked interconnection of devices has long been known and used, starting from basic systems where different system functions have been provided by separate units, for example hi-fi systems or security systems  
15 having detectors, a control panel and one or more alarm sounders. A development has been the so-called home bus systems where a greater variety of products have been linked with a view to providing enhanced overall functionality in for example domestic audio/video apparatus coupled with a home security system and the use of telephone. An example of such a home  
20 bus system is the domestic digital bus (D2B), the communications protocols for which have been issued as standard IEC 1030 by the International Electrotechnical Commission in Geneva, Switzerland. The D2B system provides a single wire control bus to which all devices are interfaced with messages carried between the various devices of the system in a  
25 standardised form of data packet.

With all such domestic equipment interconnection schemes, there is a problem of connection to apparatus not supporting the communications protocols of the scheme. As an example, a user may have a music system comprising interconnected units such as a compact disc (CD) player, amplifier,  
30 tuner and cassette player which communicate with each other using a first set of communications protocols, together with an audio visual system comprising for example a television, video recorder and satellite receiver which communicate

using a second set of protocols. In the absence of a certain degree of compatibility with existing systems, a user may be faced with having to replace many items at one time. One way to reduce this problem is to provide a gateway device which supports two or more sets of communications protocols  
5 and can "translate" messages between them, as described in US Patent 5,754,548 (Hoekstra et al), where D2B is used as a subsystem within a home electronic bus (HEB) system.

As is also described in US 5,754,548, such gateway devices can be used as part of a link between two clusters of bus-connected devices supporting the  
10 same communications protocols, but with different protocols governing communications on the link between the clusters. The link between the clusters may, for example, comprise a wireless (infra-red or RF) channel between the two gateway devices, whilst the cluster devices themselves are hard wired to respective serial data buses.

15

It is an object of the present invention to provide a networked system of devices including one or more communications links capable of handling digital data.

In accordance with a first aspect of the present invention there is  
20 provided a local communication system comprising:

- a first cluster of devices interconnected for the communication of messages via a first data bus and in accordance with a first set of communication protocols;

- a second cluster of devices interconnected for the communication of  
25 messages via a second data bus and in accordance with said first set of communication protocols; and

- a data channel linking a device of said first cluster and a device of said second cluster, said data channel supporting communication of messages in accordance with a second set of communications protocols;

30 wherein a device of the first cluster holds a stored software representation of operational features of a selected device of the second cluster and any device of the first cluster wishing to interact with said selected device

instead interacts with said stored representation. As will be described hereinafter, interaction with a locally held proxy avoids the need for rewriting of cluster communications protocols simply to accommodate different transport capabilities and/or conditions on the bridge.

5       The stored representation may be generated by the said selected device and transmitted via said data channel to said device of the first cluster, and the said stored representation may be modified in response to limitations of said data channel, in which case the modification may occur on receipt by said device of the first cluster, in response to limitations of said data channel.

10       The stored representation may model the said selected device as if it were a device of the first cluster, and the said device of the first cluster holding the stored representation may suitably be that device of the first cluster to which the data channel is connected. The said data channel may be a wireless link.

      In accordance with a further aspect of the present invention, there is  
15       provided a communications device having the technical features of a cluster-connected device in a system as recited above.

      Further features and advantages of the present invention will become apparent from reading of the description of preferred embodiments of the  
20       invention, given by way of example only and with reference to the accompanying drawings, in which:

      Figure 1 represents an arrangement of devices forming three linked clusters;

      Figure 2 shows a pair of clusters using a different interconnect  
25       mechanism to the arrangement of Figure 1;

      Figure 3 shows three clusters using a still further interconnect mechanism different to the arrangements of either Figure 1 or Figure 2; and

      Figure 4 schematically represents an arrangement for the handling of timing issues over the bridge in any of Figures 1 to 3.

30

      A first arrangement of interconnected devices is shown in Figure 1, with the devices being divided into three clusters 10, 20, 30, each based around a

respective bus 18, 28, 38 supporting communication in accordance with IEEE Standard 1394 connect and communications protocols. In the following examples, reference is made to various communications protocols including IEEE 1394, IEEE 802.11, and HAVi (the Home Audio/Video interoperability  
5 standard based around 1394), and the disclosure of the specification of these various protocols is incorporated herein by reference. As will be recognised by the skilled reader, however, conformance with such protocols is not essential to the operation of the present invention.

The devices in the first cluster 10 comprise a set-top box (STB) 11, a  
10 first digital video recorder (DVHS-1) 12, a digital versatile disc (DVD) player 13 and an RF send and receive unit 19 which acts as a gateway device for the first cluster. The devices in the second cluster 20 comprise a first television set (TV-1) 21, a second digital video recorder (DVHS-2) 22 and an RF send and receive unit 29 which acts as a gateway device for the second cluster. The  
15 devices in the third cluster 30 comprise a second television set (TV-2) 31, a third digital video recorder (DVHS-3) 32, and an RF send and receive unit 39 which acts as a gateway device for the third cluster.

The second and third clusters 20, 30 communicate with the first 10 via respective RF links 41, 42 between the gateway devices at data rates which  
20 may be up to 8Mbit/sec or even higher. At these rates, digital video transmitted from one cluster to another may be compressed according to the known MPEG standards. HAVi commands may also be exchanged between the clusters as indicated by arrows 17, 27, 37: note that the channel for these commands may be integrated with the RF channel or it may be separate.

25 In the system of Figure 1, the main value of the cordless link is for presentation, namely getting content from a source (such as the STB 11 in the first cluster) to the point of consumption (e.g. the TV-1 in the second cluster). This is particularly relevant where the source is tethered to a delivery medium, such as cable, terrestrial/satellite antenna, phone line, etc. From a logical point  
30 of view, the gateways and RF links may be treated as a single device 40 (as indicated by the dashed outline) such that the system as a whole then comprises just 1394-linked devices, although different timing issues on either

side of the bridge "device" 40 will need to be addressed, as will be described in further detail below.

A handheld PIA-like unit may be used for TV viewing although this is not necessarily of value since most rooms will have a TV anyway. PIA units have compelling value for Internet Surfing and home control, however, and they also are useful for supporting interactive TV (e.g. background information to advertisements, TV shows, etc.).

For true mobility within the home, (e.g. using a PIA-type unit) the TV picture should be stable when stationary; however, when moving some flutter is probably acceptable, and this is achievable using the high frequency RF link and MPEG compression.

In such systems, related issues include the need to protect the cordless signal from casual eavesdropping, particularly for pay-per-view content; a need to support interactive services (e.g. based on Java, MHEG); and a need to retain synchronisation between audio and video - for example, if these components are sent via separate routes.

In connection with access to the MPEG stream, some STB designs may decode right down to YC / CVBS / RGB allowing no access to the MPEG stream itself, whilst support for 1394/HAVi presumes that products are 1394/HAVi equipped which may not always be the case.

Considering the RF related issues, and beginning with those relating to MPEG streaming, for correct timing of audio and video, the MPEG 90kHz reference clock needs to be conveyed to the receiver via the RF channel. In order to broadcast to several receivers, there is no problem if all the receivers are on the same 1394 bus (i.e. in the same cluster) but where there are several clusters, it is recommended to use a dedicated MPEG stream to each, although the gateway device for the cluster sending out the MPEG streams (the source 1394 cordless AV adapter node CAVa) has to be able to configure this streaming.

In terms of presentation issues, to protect against possible errors caused by the radio channel, duplicate MPEG streams may be sent. To protect against possible delay caused by the radio channel the content could

be 'pushed' at a "faster than realtime" rate to temporary storage at the receive side. It is noted that DVD has the unique issue of high bandwidth graphic overlay which demands massive radio bandwidth for real-time transfer - this issue is beyond the scope of the present application, however.

5           In terms of recording or archiving, the streaming may be given a lower priority for the radio bandwidth, assuming sufficient 'spooling' storage is available on the sending side of the link (this helps with bandwidth management). To ensure a robust result, improved error protection may also be used (e.g. full acknowledged packet transfer).

10           Products will not generally be isolated - they will be part of a wired 1394 cluster (even if only consisting of 2 products/devices); however, the basic requirement of presentation is to communicate from one product to another, either within the same 1394 cluster, or between clusters. It is not a necessary requirement that clusters need to communicate one to another at the 1394  
15 level.

          In terms of alternative solutions to the problems of interconnection, Figure 1 represents a cordless MPEG link approach. Assuming presentation is the major requirement; this could imply simple one directional MPEG streaming from source to sink (left to right, or right to left, in the Figure). The  
20 approach keeps the 1394 buses (clusters) entirely separate, that is to say without requiring communications over the RF link to be 1394 compliant. The receive side must have the ability to control the signal originating devices (sources) within the 1394 cluster on the send side.

          The gateway (1394 CAVa) is a special HAVi Full AV controller (FAV)  
25 device. The 1394 CAVa hosts Device Control Modules (DCM's) of devices located on remote 1394 buses (if necessary, more than one bus can be linked to, for multicast purposes). This implies that, in general, all devices that are hosted will have uploadable DCM's. In Figure 1, this is illustrated by the shaded boxes attached to each gateway device: in these shaded boxes are  
30 the "proxy" DCM's of selected products located within remote clusters. The communication of HAVi commands across the radio link can be performed in any way, including proprietary methods. AV stream routing (e.g. MPEG) may



be done using 'virtual 1394 plugs' which would be co-ordinated with the RF addressing to direct the stream to the correct target 1394 cluster. In one variant, one or a set of standardised or common DCM's may be already present on the bridge. For example, a generic AV/C DCM could be included  
5 in the bridge to control AV/C devices, or a manufacturer could provide built-in DCM's for some of their own products.

An alternative arrangement of interconnected clusters is shown in Figure 2. The first cluster 50 comprises a STB 52 linked to a gateway device 59 by 1394 bus 58. Instead of RF transmission by the gateway 59, the first  
10 cluster includes a personal computer (PC) 54 or similar device which receives the MPEG from the gateway 59 as well as the HAVi commands 57 to go to a remote cluster.

The second cluster 60 comprises a digital TV/VCR unit 62 linked to a gateway device 69 via 1394 bus 68. As for the first cluster, a PC 64 is  
15 connected to the gateway 69 which receives MPEG from the PC 64, as well as the HAVi commands 65 from the first cluster 50. In this example, communication of MPEG and the HAVi commands is accomplished between the PC's 54, 64 via wireless link following IEEE 802.11 WLAN standards with each PC including an RF ISA/PCI card. Available cordless data links following  
20 these standards include Diamond HomeFree (which has a data rate of 1Mbps) and RadioLan (10Mbps).

In general, such an arrangement is less favoured than that of Figure 1 in that a certain amount of buffering is liable to be required at the send and/or receive sides, although this can simply be provided by the PC's. The  
25 arrangement does have benefit, however, in that it can accommodate devices unsuited for connection to the 1394 bus of a cluster: in Figure 2 this is illustrated by analogue TV/VCR 67 adjacent the second cluster which is supplied with images from an MPEG decoder 66 fed directly from the PC 64 of the cluster.

30 A further interconnect arrangement is shown in Figure 3 and comprises three clusters 70, 80, 90 each having a respective cordless bridge CB device as gateway device 71, 81, 91. In this example, the bridging between the

clusters is by full cordless communications and at data rates determined by the cordless protocols used.

A problem that can arise with sending streams over 1394 bridges is how to handle the 1394-level timestamps present in many of the streaming formats. These are required because packet delivery is time critical for some formats, including MPEG. Buses on 1394 have a bus-wide clock such that, for timestamps generated on one bus to be valid on another, the clocks of the two buses must somehow be synchronised which, the skilled reader will recognise, is not always a simple matter. In addition, timestamps within transmitted data packets may need modification or adjustment by the bridge to take account of generally longer delivery times to devices on the far side of the bridge than to devices on the data originating bus.

In order to avoid such problems, a system as shown in Figure 4 is suitably employed, with the 1394 buses 100, 110 on either side of the bridge 120. At point a, packets from the 1394 bus 100 are encoded and timestamped as specified in a further standard, IEC61883.

At point b, all the packets have passed through an interface chip or circuit assembly PHY 102 acting as interface to the 1394 physical layer, and through a link chip or circuit AVLINK 104 which implements IEC61883 for the relevant streaming format: an example of this chip is the Philips PDI1394L11. At b, the packets have had all 1394/61883 timestamps removed. Packets are released from the AVLINK chip 104 at the correct times, such that the timing information is now embodied by the release times of the packets themselves. In the following, we assume a packet is released at time  $t$ .

The next step is the sending of the packet across the bridge 120: the only requirement of the bridge system is that it delivers the packet with a constant delay, referred to herein as  $T$ . How the bridge achieves this constancy is beyond the scope of the present invention: what matters is that a packet can be relied upon to arrive at a further AVLINK chip 114 on the other side of the bridge at time  $= t + T$ .

At point c, packets arrive at the "correct" time due to the constant delay  $T$ , and the AVLINK chip will now encode and timestamp them in conventional

fashion, as dictated by IEC61883. These timestamps will be in the context of the second bus 110. If it is determined that packets have been lost or corrupted by the bridge 120, it is here at c, between the bridge and AVLINK 114 that recovery actions should be initiated.

5 From point d, having been passed through a further physical layer PHY interface 112, the packets are sent out over the second bus 110 with timestamps appropriate for that bus.

To send digital video (DV) streams, there are some different requirements, largely due to the fact that DV is slightly less time-critical on  
10 delivery than MPEG, and a slightly different mechanism is used, based around the SYT timestamp as also specified in IEC61883. This allows for a stream to be sent with an "attached" clock signal, which can be up to 8kHz. To send this, a clock signal with a frequency  $\leq 8\text{kHz}$  is input to the AVLINK chip on the transmitting node. Every clock cycle (every "tick"), the value of the bus clock  
15 at that instant will be sampled, a constant value will be added to compensate for the transport delay, and transmitted over the bridge as part of the stream. The receiving node will store the value until such time as its own clock is equal to that value, and then output a tick. The 8kHz limit is imposed as only one SYT timestamp can be sent per 1394 isochronous packet, of which there are  
20 8000 per second.

As before, the physical means of transportation for this clock signal across the bridge will depend on the construction of the bridge itself. The same principle of taking the output from the receiving AVLINK chip on the first bus will mean that no timestamps in the context of the first bus appear on the  
25 second bus; the clock signal is just sent over the bridge to be re-timestamped to the context of the second bus.

In the interconnect arrangements described, a number of improvements are provided, the first of which may be described as the provision of mobile DCM's – that is to say DCM's crossing from one cluster to another. HAVi  
30 describes the Device Control Module (DCM) software which represents (or is an abstraction of) the control system of a physical device. This software can be run on another device that is capable of running such software. For

instance, the DCM for a D-VHS recorder can be run on a Set Top Box. Currently, HAVi assumes that all devices in the network are connected on one single bus. The present invention extends this by providing for the DCM's to cross over the bridge. By having a representation of the remote device on the  
5 near side of the bridge, bridging problems can be greatly simplified as the remote device is apparently now on the near side of the bridge. In other words, there is provided software on one side of a bridge between buses which represents a device on another bus which is connected to another portal of the bridge.

10 A further improvement relates to the usage of so-called Legacy devices within the HAVi V1.0 specification. Legacy AV devices (LAV's) are already defined in HAVi and allow non-HAVi devices to be accessed and controlled by a HAVi network, by the use of DCM's (mentioned above). In effect, the DCM for a Legacy device is a bridge between a HAVi network and the native control  
15 of the Legacy Device (e.g. the above-mentioned D2B protocols). In this way, non-HAVi devices can be made to appear like a HAVi device on the HAVi network. This idea extends this mechanism to allow control of real HAVi devices on the far side of a bridge via the representation of that device on the near side of the bridge.

20 A still further improvement relates to the modification of Virtual plug parameters. HAVi already describes the capabilities of a connection by assigning parameters to "virtual plugs" situated at each end of the connection path. In a bridge, parameters such as bandwidth are limited and are less than the capabilities of the actual physical device. The modification allows the  
25 representation of a remote device on the near side of the bridge to be modified to make allowances for the limitations of the bridge transport medium (e.g. RF).

From reading the present disclosure, other modifications and variations will be apparent to persons skilled in the art, including equivalents and  
30 features which are already known in the field of bus-connected and cordless communication systems and components and which may be used instead of or in addition to features already disclosed herein.

## CLAIMS

1. A local communication system comprising:
  - 5 a first cluster of devices interconnected for the communication of messages via a first data bus and in accordance with a first set of communication protocols;
  - a second cluster of devices interconnected for the communication of messages via a second data bus and in accordance with said first set of
  - 10 communication protocols; and
  - a data channel linking a device of said first cluster and a device of said second cluster, said data channel supporting communication of messages in accordance with a second set of communications protocols;
  - wherein a device of the first cluster holds a stored software
  - 15 representation of operational features of a selected device of the second cluster and any device of the first cluster wishing to interact with said selected device instead interacts with said stored representation.
2. A system as claimed in Claim 1, wherein said stored
- 20 representation is generated by said selected device and transmitted via said data channel to said device of the first cluster.
3. A system as claimed in Claim 1 or Claim 2, wherein said stored
- 25 representation is modified in response to limitations of said data channel.
4. A system as claimed in Claim 2, wherein said stored
- representation is modified, on receipt by said device of the first cluster, in response to limitations of said data channel.
- 30 5. A system as claimed in Claim 1, wherein said stored representation models said selected device as if it were a device of the first cluster.

6. A system as claimed in any of Claims 1 to 5, wherein the said device of the first cluster holding the stored representation is that device of the first cluster to which the data channel is connected.

5 7. A system as claimed in any of Claims 1 to 6, wherein said data channel is a wireless link.

8. A communications device having the technical features of a cluster-connected device in a system as claimed in any of Claims 1 to 7.

10

1/3

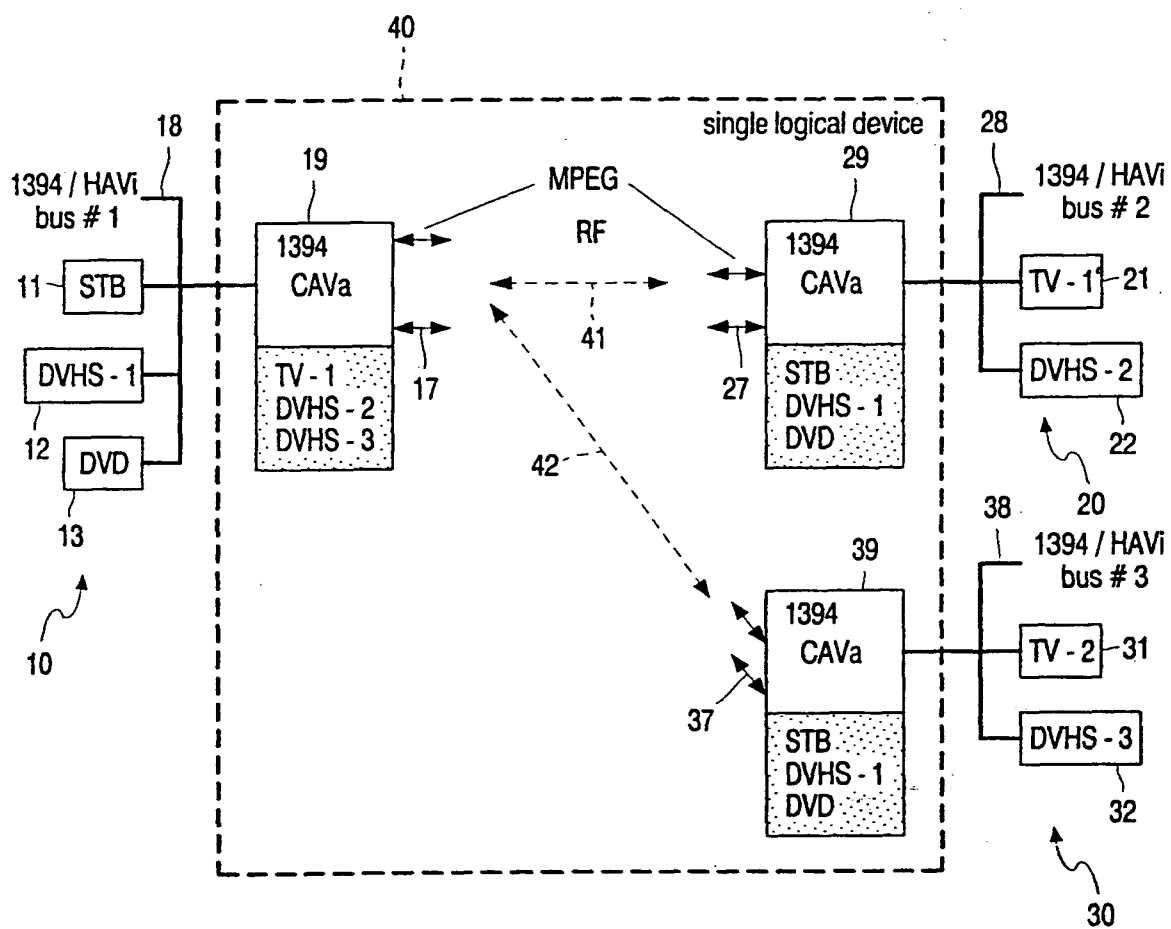


FIG. 1

2/3

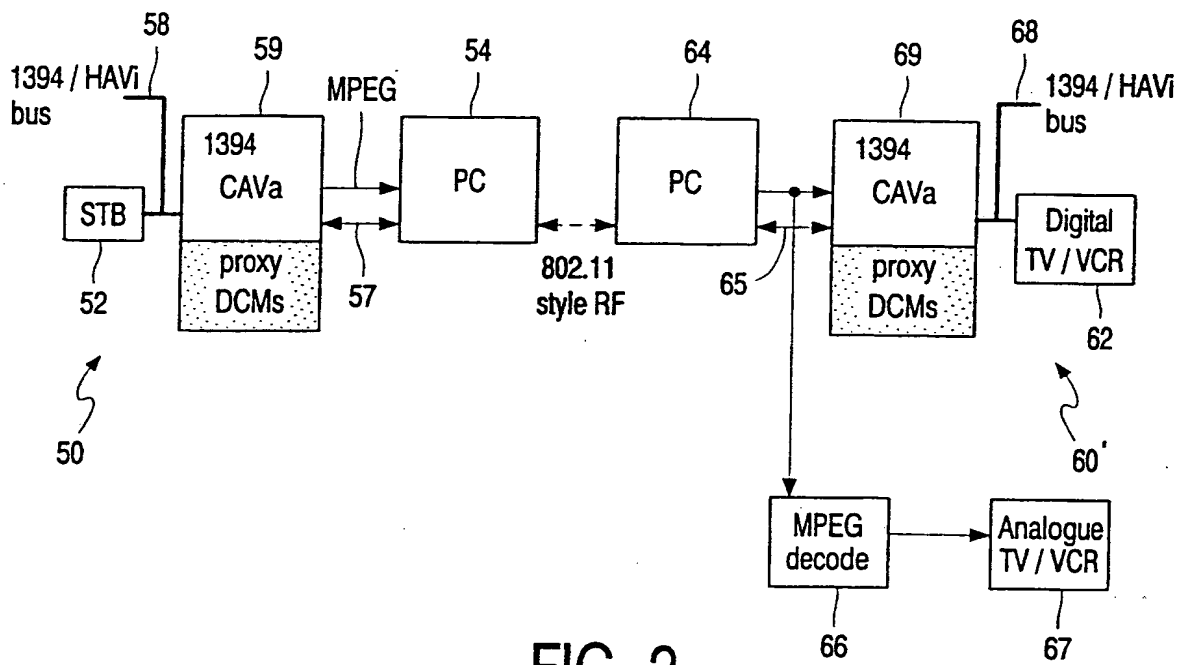


FIG. 2

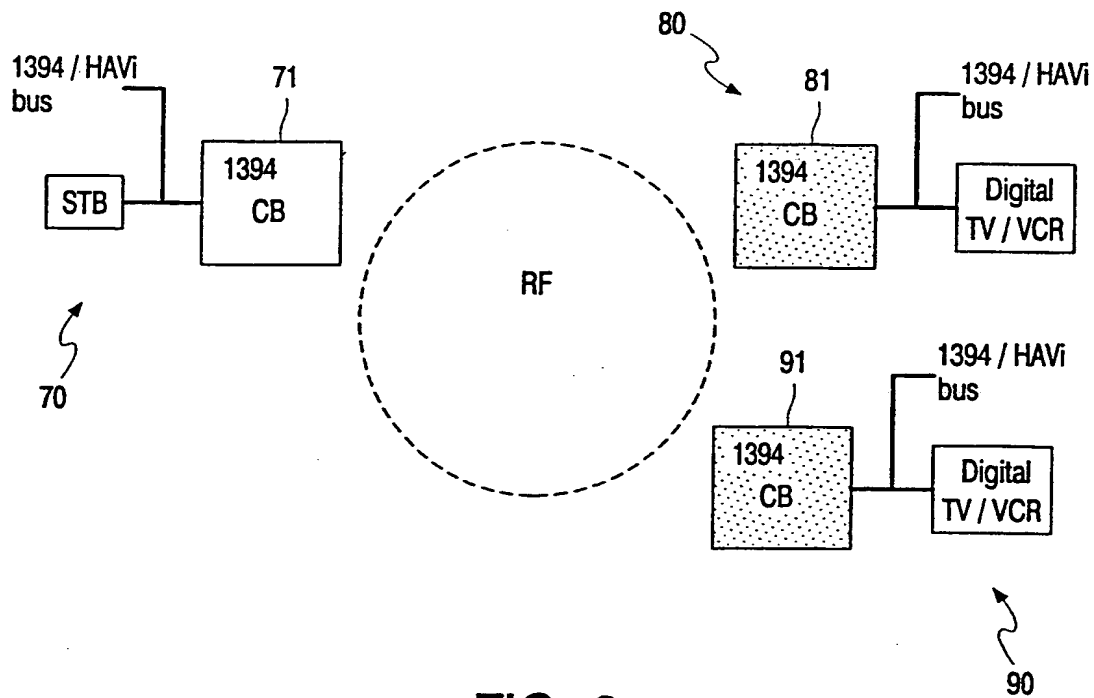


FIG. 3



3/3

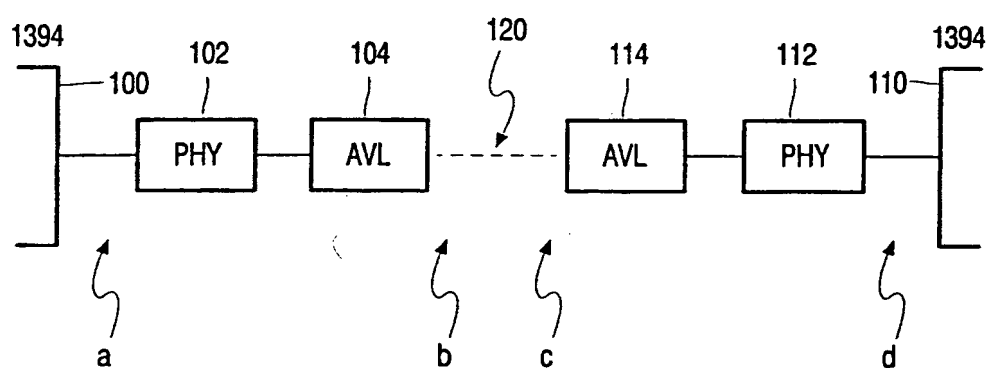


FIG. 4

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/08449

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04L12/28 H04L12/46

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 35856 A (SONY ELECTRONICS INC) 15 July 1999 (1999-07-15) abstract page 5, line 12 -page 6, line 10 page 7, line 10 - line 25 page 15, line 7 - line 26 page 19, line 1 -page 20, line 22 page 21, line 22 -page 22, line 16 page 23, line 9 -page 24, line 9	1,2,5,6, 8
A	---	3,4
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

23 January 2001

Date of mailing of the international search report

05/02/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Tous Fajardo, J

# INTERNATIONAL SEARCH REPORT

Intern 1al Application No

PCT/EP 00/08449

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 837 579 A (TOKYO SHIBAURA ELECTRIC CO) 22 April 1998 (1998-04-22) column 2, line 13 - line 20 column 18, line 38 -column 19, line 22 column 20, line 48 -column 21, line 37 column 22, line 46 -column 23, line 9 column 23, line 46 -column 24, line 58 column 27, line 25 - line 47	1,2,5,6, 8
Y	-----	7
Y	EP 0 835 037 A (TOKYO SHIBAURA ELECTRIC CO) 8 April 1998 (1998-04-08) figure 41 -----	7

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Interr. Application No

PCT/EP 00/08449

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9935856 A	15-07-1999	US 6085236 A	04-07-2000
		AU 1634299 A	26-07-1999
		EP 1058985 A	13-12-2000
EP 0837579 A	22-04-1998	JP 10126423 A	15-05-1998
EP 0835037 A	08-04-1998	JP 10112730 A	28-04-1998